





VECTOR

DMX Chart

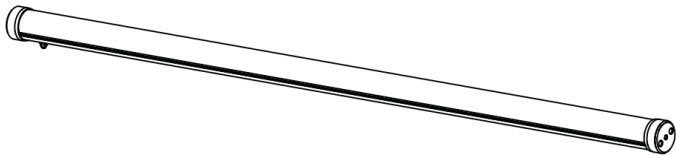

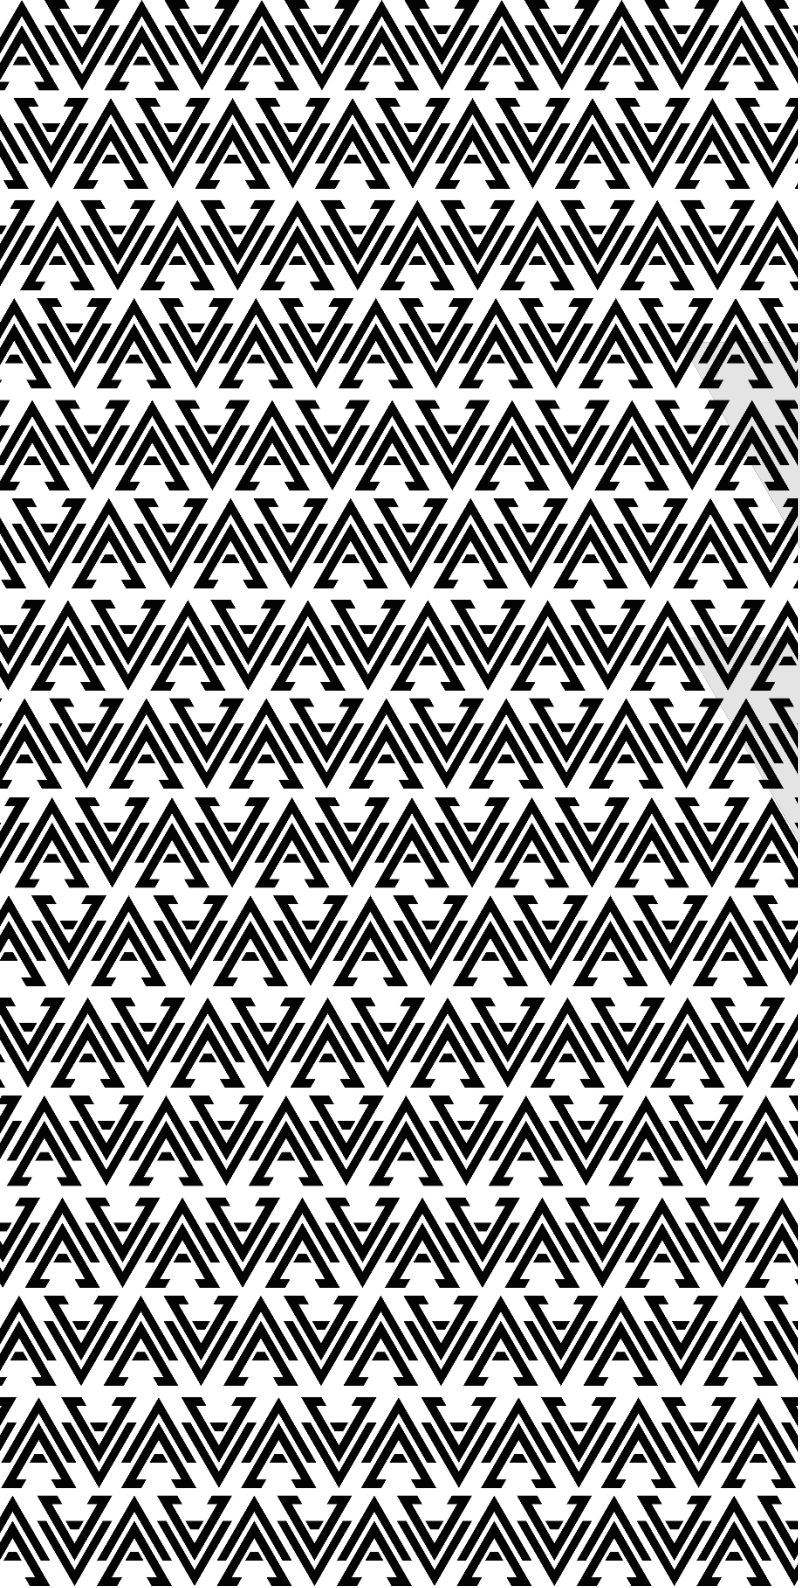



Tryb									Funkcja	Wartość Home	Wartość DMX			Opis	
2 CH	HSV	5 CH	10 CH	12 CH	20 CH	40 CH	80 CH	85 CH							
Kanał															
	3			1					1	Master dimmer	0	0	-	255	0-100%
				2					2	Dimmer Curve	0	0	-	255	
	1									Hue	0	0	-	255	0°-360°
	2									Saturation	0	0	-	255	0-100%
1				9						Color Gel	0	0	-	0	Open
												1	-	2	Color 1
												3	-	4	Color 2
												5	-	6	Color 3
												7	-	8	Color 4
												9	-	10	Color 5
												11	-	12	Color 6
												13	-	14	Color 7
												15	-	16	Color 8
												17	-	18	Color 9
												19	-	20	Color 10
												21	-	22	Color 11
												23	-	24	Color 12
												25	-	26	Color 13
												27	-	28	Color 14
												29	-	30	Color 15
												31	-	32	Color 16
												33	-	34	Color 17
												35	-	36	Color 18
												37	-	38	Color 19
												39	-	40	Color 20
												41	-	42	Color 21
												43	-	44	Color 22



Tryb									Funkcja	Wartość Home	Wartość DMX		Opis
2 CH	HSV	5 CH	10 CH	12 CH	20 CH	40 CH	80 CH	85 CH					
Kanał													
1				9					Color Gel	0	45 - 46	Color 23	
											47 - 48	Color 24	
											49 - 50	Color 25	
											51 - 52	Color 26	
											53 - 54	Color 27	
											55 - 56	Color 28	
											57 - 58	Color 29	
											59 - 60	Color 30	
											61 - 62	Color 31	
											63 - 64	Color 32	
											65 - 66	Color 33	
											67 - 68	Color 34	
											69 - 70	Color 35	
											71 - 72	Color 36	
											73 - 74	Color 37	
											75 - 76	Color 38	
											77 - 78	Color 39	
											79 - 80	Color 40	
											81 - 82	Color 41	
											83 - 84	Color 42	
											85 - 86	Color 43	
											87 - 88	Color 44	
											89 - 90	Color 45	
											91 - 92	Color 46	
											93 - 94	Color 47	
											95 - 96	Color 48	
											97 - 98	Color 49	



Tryb									Funkcja	Wartość Home	Wartość DMX		Opis
2 CH	HSV	5 CH	10 CH	12 CH	20 CH	40 CH	80 CH	85 CH					
Kanał													
1				9					Color Gel	0	99 - 100	Color 50	
											101 - 102	Color 51	
											103 - 104	Color 52	
											105 - 106	Color 53	
											107 - 108	Color 54	
											109 - 110	Color 55	
											111 - 112	Color 56	
											113 - 114	Color 57	
											115 - 116	Color 58	
											117 - 118	Color 59	
											119 - 120	Color 60	
											121 - 122	Color 61	
											123 - 124	Color 62	
											125 - 126	Color 63	
											127 - 128	Color 64	
											129 - 130	Color 65	
											131 - 132	Color 66	
											133 - 134	Color 67	
											135 - 136	Color 68	
											137 - 138	Color 69	
											139 - 140	Color 70	
											141 - 142	Color 71	
											143 - 144	Color 72	
											145 - 146	Color 73	
											147 - 148	Color 74	
											149 - 150	Color 75	
											151 - 152	Color 76	





Tryb									Funkcja	Wartość Home	Wartość DMX		Opis
2 CH	HSV	5 CH	10 CH	12 CH	20 CH	40 CH	80 CH	85 CH					
Kanał													
1				9					Color Gel	0	153	154	Color 77
											155	156	Color 78
											157	158	Color 79
											159	160	Color 80
											161	162	Color 81
											163	164	Color 82
											165	166	Color 83
											167	168	Color 84
											169	170	Color 85
											171	172	Color 86
											173	174	Color 87
											175	176	Color 88
											177	178	Color 89
											179	180	Color 90
											181	182	Color 91
											183	184	Color 92
											185	186	Color 93
											187	188	Color 94
											189	190	Color 95
											191	192	Color 96
								193	194	Color 97			
								195	196	Color 98			
								197	198	Color 99			
								199	200	Color 100			
								201	255	Color 101			
2				10					CCT	0	0	- 0	Off
											1	- 255	1750K-20000K



Tryb									Funkcja	Wartość Home	Wartość DMX			Opis
2 CH	HSV	5 CH	10 CH	12 CH	20 CH	40 CH	80 CH	85 CH						
Kanał														
		1	1	1	1	1	1	3	Red 1	255	0	-	255	0-100%
		2	2	2	2	2	2	4	Green 1	255	0	-	255	0-100%
		3	3	3	3	3	3	5	Blue 1	255	0	-	255	0-100%
		4	4	4	4	4	4	6	Mint 1	255	0	-	255	0-100%
		5	5	5	5	5	5	7	Amber 1	255	0	-	255	0-100%
		6			6	6	6	8	Red 2	255	0	-	255	0-100%
		7			7	7	7	9	Green 2	255	0	-	255	0-100%
		8			8	8	8	10	Blue 2	255	0	-	255	0-100%
		9			9	9	9	11	Mint 2	255	0	-	255	0-100%
		10			10	10	10	12	Amber 2	255	0	-	255	0-100%
					11	11	11	13	Red 3	255	0	-	255	0-100%
					12	12	12	14	Green 3	255	0	-	255	0-100%
					13	13	13	15	Blue 3	255	0	-	255	0-100%
					14	14	14	16	Mint 3	255	0	-	255	0-100%
					15	15	15	17	Amber 3	255	0	-	255	0-100%
					16	16	16	18	Red 4	255	0	-	255	0-100%
					17	17	17	19	Green 4	255	0	-	255	0-100%
					18	18	18	20	Blue 4	255	0	-	255	0-100%
					19	19	19	21	Mint 4	255	0	-	255	0-100%
					20	20	20	22	Amber 4	255	0	-	255	0-100%
					21	21	21	23	Red 5	255	0	-	255	0-100%
					22	22	22	24	Green 5	255	0	-	255	0-100%
					23	23	23	25	Blue 5	255	0	-	255	0-100%
					24	24	24	26	Mint 5	255	0	-	255	0-100%
					25	25	25	27	Amber 5	255	0	-	255	0-100%
					26	26	26	28	Red 6	255	0	-	255	0-100%
					27	27	27	29	Green 6	255	0	-	255	0-100%



Tryb									Funkcja	Wartość Home	Wartość DMX			Opis	
2 CH	HSV	5 CH	10 CH	12 CH	20 CH	40 CH	80 CH	85 CH							
Kanał															
							28	28	30	Blue 6	255	0	-	255	0-100%
							29	29	31	Mint 6	255	0	-	255	0-100%
							30	30	32	Amber 6	255	0	-	255	0-100%
							31	31	33	Red 7	255	0	-	255	0-100%
							32	32	34	Green 7	255	0	-	255	0-100%
							33	33	35	Blue 7	255	0	-	255	0-100%
							34	34	36	Mint 7	255	0	-	255	0-100%
							35	35	37	Amber 7	255	0	-	255	0-100%
							36	36	38	Red 8	255	0	-	255	0-100%
							37	37	39	Green 8	255	0	-	255	0-100%
							38	38	40	Blue 8	255	0	-	255	0-100%
							39	39	41	Mint 8	255	0	-	255	0-100%
							40	40	42	Amber 8	255	0	-	255	0-100%
								41	43	Red 9	255	0	-	255	0-100%
								42	44	Green 9	255	0	-	255	0-100%
								43	45	Blue 9	255	0	-	255	0-100%
								44	46	Mint 9	255	0	-	255	0-100%
								45	47	Amber 9	255	0	-	255	0-100%
								46	48	Red 10	255	0	-	255	0-100%
								47	49	Green 10	255	0	-	255	0-100%
								48	50	Blue 10	255	0	-	255	0-100%
								49	51	Mint 10	255	0	-	255	0-100%
								50	52	Amber 10	255	0	-	255	0-100%
								51	53	Red 11	255	0	-	255	0-100%
								52	54	Green 11	255	0	-	255	0-100%
								53	55	Blue 11	255	0	-	255	0-100%
								54	56	Mint 11	255	0	-	255	0-100%



Tryb									Funkcja	Wartość Home	Wartość DMX			Opis	
2 CH	HSV	5 CH	10 CH	12 CH	20 CH	40 CH	80 CH	85 CH							
Kanał															
								55	57	Amber 11	255	0	-	255	0-100%
								56	58	Red 12	255	0	-	255	0-100%
								57	59	Green 12	255	0	-	255	0-100%
								58	60	Blue 12	255	0	-	255	0-100%
								59	61	Mint 12	255	0	-	255	0-100%
								60	62	Amber 12	255	0	-	255	0-100%
								61	63	Red 13	255	0	-	255	0-100%
								62	64	Green 13	255	0	-	255	0-100%
								63	65	Blue 13	255	0	-	255	0-100%
								64	66	Mint 13	255	0	-	255	0-100%
								65	67	Amber 13	255	0	-	255	0-100%
								66	68	Red 14	255	0	-	255	0-100%
								67	69	Green 14	255	0	-	255	0-100%
								68	70	Blue 14	255	0	-	255	0-100%
								69	71	Mint 14	255	0	-	255	0-100%
								70	72	Amber 14	255	0	-	255	0-100%
								71	73	Red 15	255	0	-	255	0-100%
								72	74	Green 15	255	0	-	255	0-100%
								73	75	Blue 15	255	0	-	255	0-100%
								74	76	Mint 15	255	0	-	255	0-100%
								75	77	Amber 15	255	0	-	255	0-100%
								76	78	Red 16	255	0	-	255	0-100%
								77	79	Green 16	255	0	-	255	0-100%
								78	80	Blue 16	255	0	-	255	0-100%
								79	81	Mint 16	255	0	-	255	0-100%
								80	82	Amber 16	255	0	-	255	0-100%
				8				83		Strobe	0	0	-	0	Open





Tryb									Funkcja	Wartość Home	Wartość DMX	Opis	
2 CH	HSV	5 CH	10 CH	12 CH	20 CH	40 CH	80 CH	85 CH					
Kanał													
				8					83	Strobe	0	1 - 255	Wolno -> Szybko
				11					84	Color FX	0	0 - 0	Off
												1 - 8	Color FX 1
												9 - 16	Color FX 2
												17 - 24	Color FX 3
												25 - 32	Color FX 4
												33 - 40	Color FX 5
												41 - 48	Color FX 6
												49 - 56	Color FX 7
												57 - 64	Color FX 8
												65 - 72	Color FX 9
												73 - 80	Color FX 10
												81 - 88	Color FX 11
												89 - 96	Color FX 12
												97 - 104	Color FX 13
												105 - 112	Color FX 14
												113 - 120	Color FX 15
												121 - 128	Color FX 16
												129 - 136	Color FX 17
												137 - 144	Color FX 18
												145 - 152	Color FX 19
												153 - 160	Color FX 20
												161 - 168	Color FX 21
												169 - 176	Color FX 22
												177 - 184	Color FX 23
												185 - 192	Color FX 24
												193 - 200	Color FX 25



Tryb									Funkcja	Wartość Home	Wartość DMX			Opis
2 CH	HSV	5 CH	10 CH	12 CH	20 CH	40 CH	80 CH	85 CH						
Kanał														
				11				84	Color FX	0	201	-	208	Color FX 26
											209	-	216	Color FX 27
											217	-	224	Color FX 28
											225	-	232	Color FX 29
											233	-	255	Color FX 30
				12				85	Color FX Speed	0	0	-	0	Off
											1	-	255	Wolno -> Szybko

